



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)


(51) International Patent Classification <sup>7</sup> : <b>A01G 25/02, B29C 47/02</b>		(11) International Publication Number: <b>WO 00/10378</b>
<b>A1</b>		(43) International Publication Date: <b>2 March 2000 (02.03.00)</b>
(21) International Application Number: <b>PCT/EP99/05751</b>		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
(22) International Filing Date: <b>9 August 1999 (09.08.99)</b>		
(30) Priority Data: <b>SV98A000047 20 August 1998 (20.08.98) IT</b>		
(71)(72) Applicant and Inventor: <b>GIUFFRÉ, Carmelo (IT/IT); Via Crispi, 7, I-98071 Capo d'Orlando (IT).</b>		
(74) Agent: <b>KARAGHIOSOFF, Giorgio, A.; Karaghiosoff &amp; Frizzi S.a.s., Via Pecorile, 27/B, I-17015 Celle Ligure (IT).</b>		

## Published

With international search report.

Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: METHOD AND PLANT FOR FABRICATING DRIP IRRIGATION PIPES

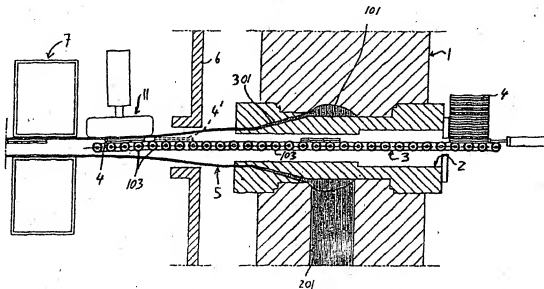

## (57) Abstract

The invention relates to a method for fabricating a drip irrigation pipe, comprising a pipe (5) wherein a plurality of dripping elements (4) are bound, communicating with the outside through holes formed in the pipe wall. The method according to the invention provides that the pipe (5) is extruded and the individual dripping elements (4) are bound therein by consecutively feeding the dripping elements (4) inside the pipe through the extruding head (1). The speed of the pipe (5) is higher than that of the pipe upon extrusion at least in the area of first contact between the pipe and the dripping elements (4). The invention also relates to a plant for implementing said method.